

Thin-Film RF/Microwave Filters

Low Pass – Harmonic Lead-Free

LP0603 Series – LGA Termination



GENERAL DESCRIPTION

The LP0603 ITF (Integrated Thin Film) Lead-Free LGA Low Pass Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Low Pass Filters are offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

FEATURES

- Miniature Size: 0603
- Frequency Range: 900MHz-6.0GHz
- Characteristic Impedance: 50 Ohm
- Operating/Storage Temperature: -40°C to +85°C
- Power Rating: 3W Continuous
- Low Profile
- Rugged Construction
- Lead Free
- Taped and Reeled


APPLICATIONS

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LANs
- RFID

LAND GRID ARRAY ADVANTAGES

- Inherent Low Profile
- Self Alignment during Reflow
- Excellent Solderability
- Low Parasitics
- Better Heat Dissipation

HOW TO ORDER

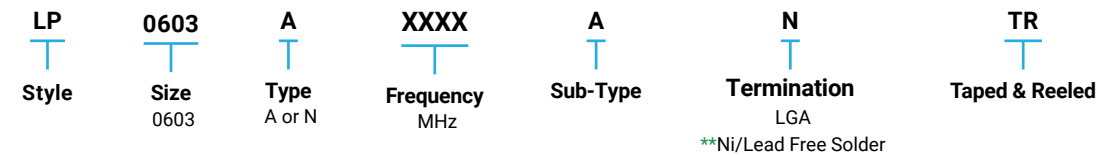

FINAL QUALITY INSPECTION

Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance: 125°C, IR, 4 hours

TERMINATION

Nickel/Lead-Free Solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

**RoHS compliant




Thin-Film RF/Microwave Filters

Low Pass – Lead-Free

LP0603 Series – LGA Termination




DIMENSIONS: millimeters (inches) (Bottom View)

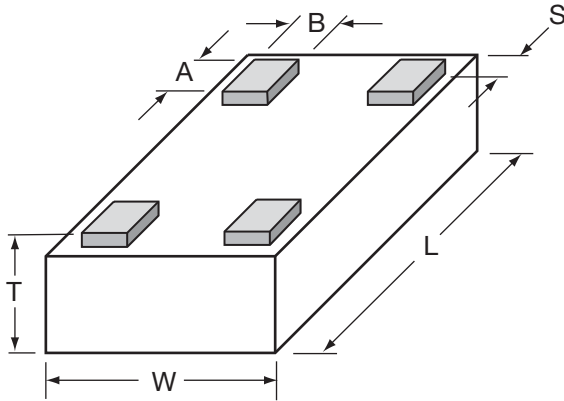


L	1.6±0.1 (0.063±0.004)	A	0.25±0.05 (0.010±0.002)
W	0.84±0.1 (0.033±0.004)	B	0.20±0.05 (0.008±0.002)
T	0.60±0.1 (0.024±0.004)	S	0.05±0.05 (0.002±0.002)

TERMINALS AND ORIENTATION IN TAPE (TOP VIEW)

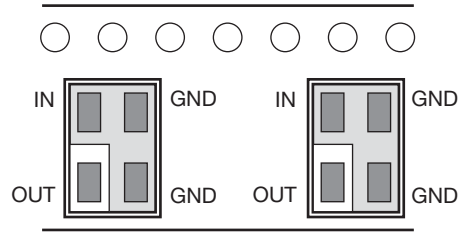

RECOMMENDED PAD LAYOUT (MM)

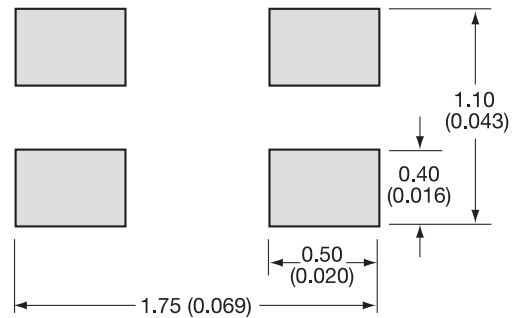

ELECTRICAL CHARACTERISTICS

(Guaranteed over -40°C to $+85^{\circ}\text{C}$ Operating Temperature Range)

P/N	Frequency Band [MHz]	I. Loss [dB]	VSWR max [dB]	Attenuation typ. [dB]
LP0603A0902ANTR	890-915	0.35 typ (0.5 max)	1.4	25 @ 2xF0 14 @ 3xF0
LP0603A0947ANTR	935-960	0.35 typ (0.5 max)	1.4	25 @ 2xF0 17 @ 3xF0
LP0603A1747ANTR	1710-1785	0.3 typ (0.5 max)	1.4	25 @ 2xF0 17 @ 3xF0
LP0603A1842ANTR	1805-1880	0.3 typ (0.5 max)	1.4	27 @ 2xF0 15 @ 3xF0
LP0603A1880ANTR	1840-1920	0.3 typ (0.5 max)	1.4	25 @ 2xF0 17 @ 3xF0
LP0603A1950ANTR	1920-1980	0.3 typ (0.5 max)	1.4	27 @ 2xF0 15 @ 3xF0
LP0603A2140ANTR	2110-2170	0.3 typ (0.5 max)	1.4	27 @ 2xF0 17 @ 3xF0
LP0603A2442ANTR	2412-2472	0.3 typ (0.5 max)	1.4	25 @ 2xF0 17 @ 3xF0
LP0603N3500ANTR	3400-3600	-0.3 typ. -0.5 max.	1.4	30 @ 2xF0 20 @ 3xF0
LP0603N4500ANTR	4400-4600	-0.3 typ. -0.5 max.	1.4	30 @ 2xF0 20 @ 3xF0
LP0603N5200ANTR	5050-5350	-0.2 typ. -0.5 max.	1.4	30 @ 2xF0 20 @ 3xF0
LP0603N5500ANTR	5350-5650	-0.2 typ. -0.5 max.	1.4	30 @ 2xF0 20 @ 3xF0
LP0603N6000ANTR	5900-6100	-0.3 typ. -0.5 max.	1.4	30 @ 2xF0 20 @ 3xF0

NOTE: Additional Frequencies Available Upon Request



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.


Thin-Film RF/Microwave Filters

Low Pass – Lead-Free


LP0603 Series – LGA Termination




LP0603A0902ANTR

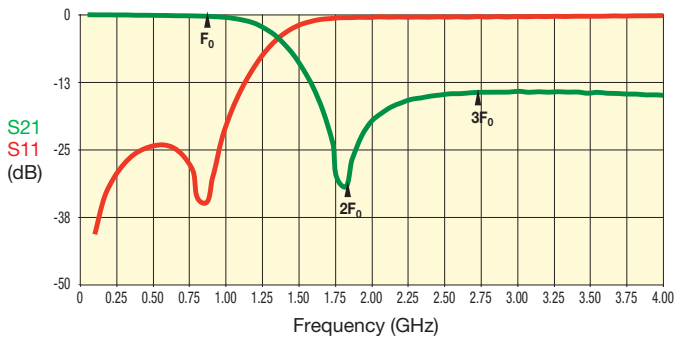


LP0603A0947ANTR

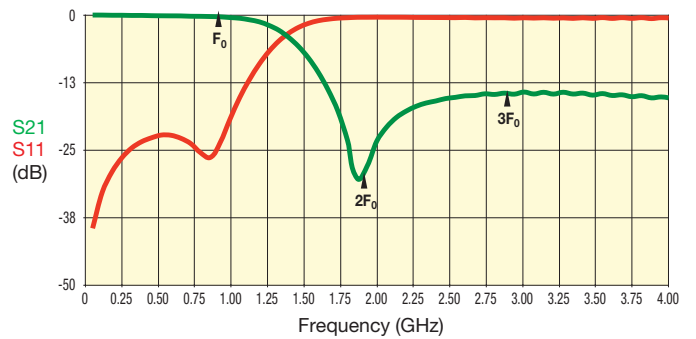


LP0603A1747ANTR

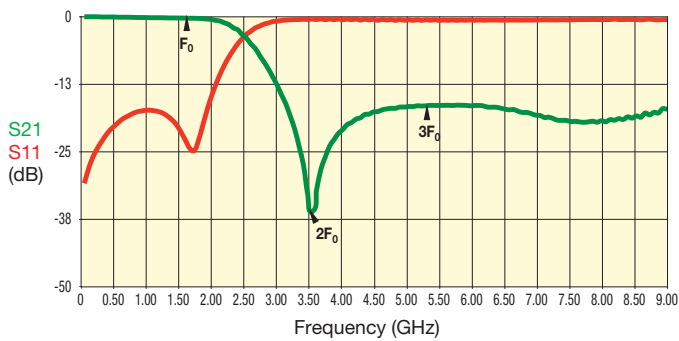


LP0603A1842ANTR

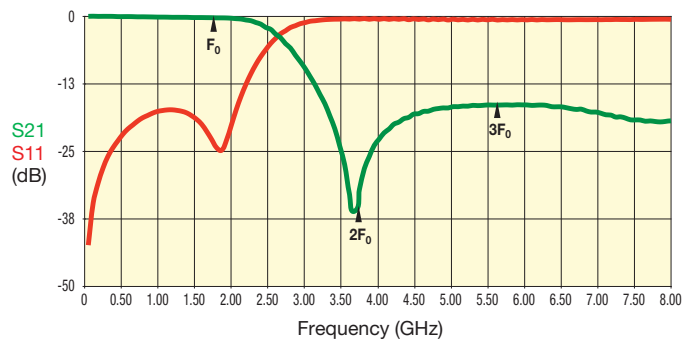

LP0603A1880ANTR

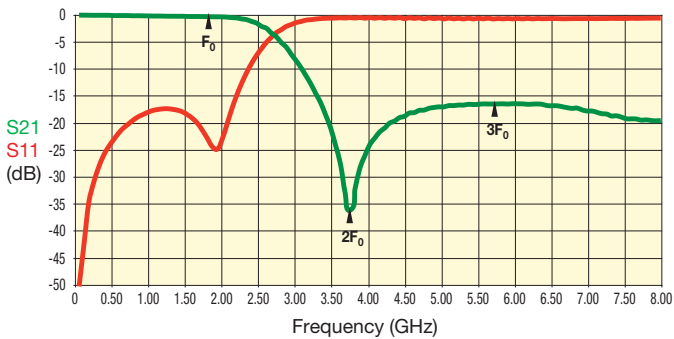

LP0603A1950ANTR

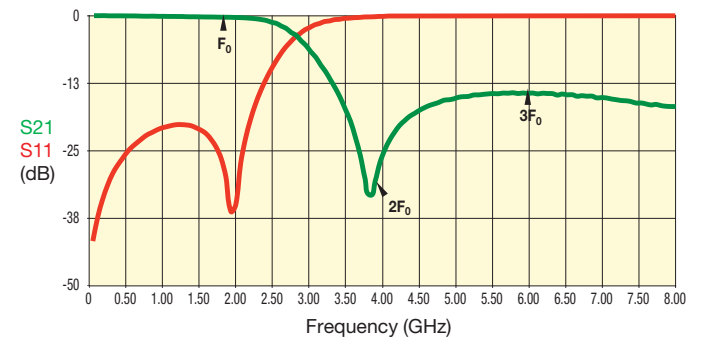


Thin-Film RF/Microwave Filters

Low Pass – Lead-Free


LP0603 Series – LGA Termination




LP0603A2140ANTR

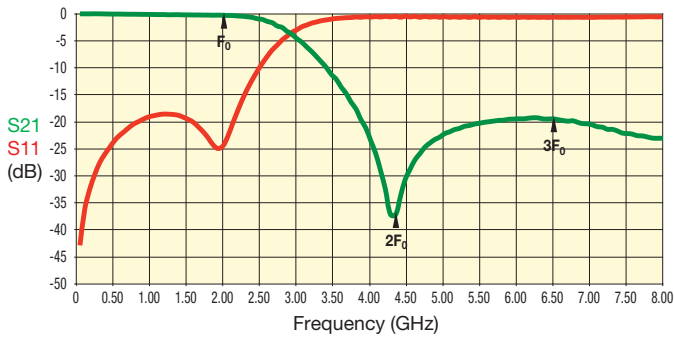


LP0603A2442ANTR

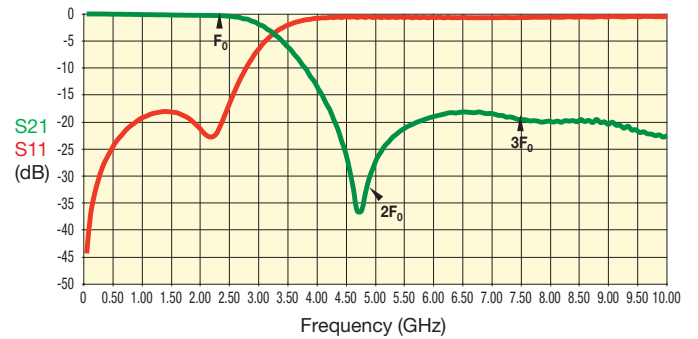


LP0603N3500ANTR

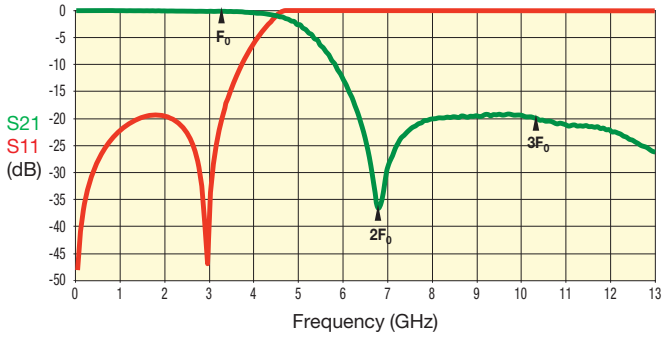


LP0603N5200ANTR

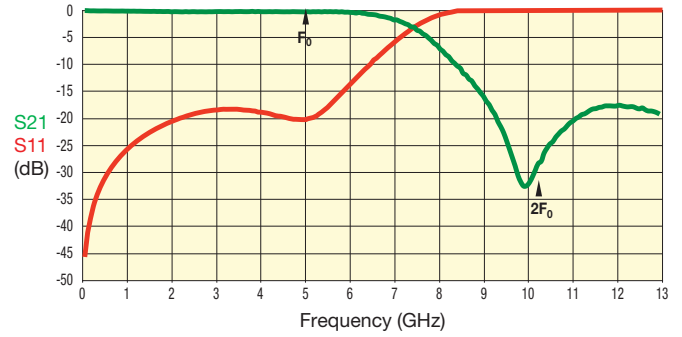


LP0603N5500ANTR

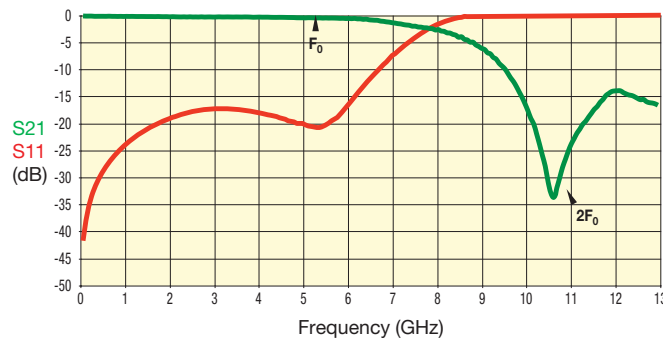

LP0603N4500ANTR

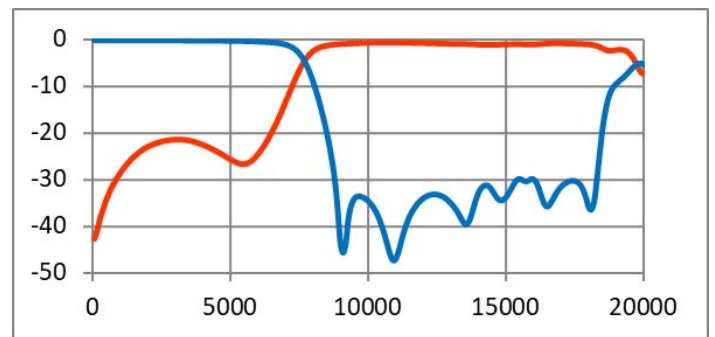

LP0603N6000ANTR

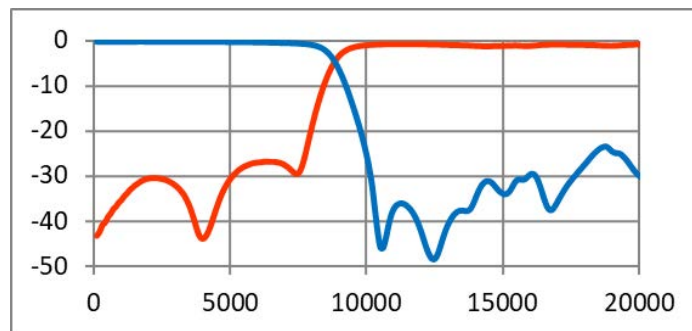

Thin-Film RF/Microwave Filters

Low Pass – Lead-Free

LP0603 Series – Test Jig

TEST JIG FOR LP0603 LEAD-FREE LGA LOW PASS FILTER

GENERAL DESCRIPTION

These jigs are designed for testing the LP0603 LGA Low Pass Filters using a Vector Network Analyzer.

They consist of a dielectric substrate, having 50Ω microstrips as conducting lines and a bottom ground plane located at a distance of 0.127mm from the microstrips.

The substrate used is Neltec's NH9338ST0127C1BC (or similar).

The connectors are SMA type (female), 'Johnson Components Inc.' Product P/N: 142-0701-841 (or similar).

Both a measurement jig and a calibration jig are provided.

The calibration jig is designed for a full 2-port calibration, and consists of an open line, short line and through line. LOAD calibration can be done by a 50Ω SMA termination.

MEASUREMENT PROCEDURE


Follow the VNA's instruction manual and use the [calibration jig](#) to perform a full 2-Port calibration in the required bandwidths.

Solder the filter to the [measurement jig](#) as follows:

Input (Filter)	▶ Connector 1 (Jig)	GND (Filter) ▶ GND (Jig)
Output (Filter)	▶ Connector 2 (Jig)	GND (Filter) ▶ GND (Jig)

Set the VNA to the relevant frequency band. Connect the VNA using a 10dB attenuator on the jig terminal connected to port 2 (using an RF cable).

Measurement

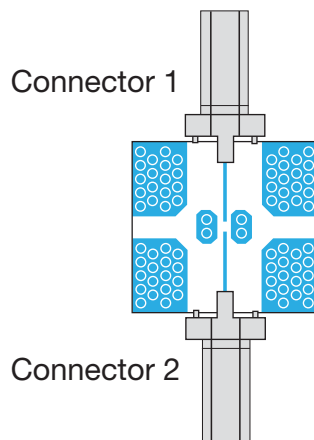

Calibration Jig

