

Part No. 1004259 GPS/GLONASS Ceramic Patch Antenna (Active)

1.575 GHz; 1.602 GHz

Supports: Tracking, Smart Home, Agriculture, Automotive, Healthcare, Digital Signage, Wearables, Industrial Devices



GPS/GLONASS Ceramic Patch antenna (Active)

1.575 GHz; 1.602 GHz

KEY BENEFITS

Reduced Costs & Time-to-Market

Standard antennas eliminate design fees, redesign cycle time and minimize risk associated with customer solution. Quicker time to market.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met. Reliability

M2M, Industrial

recommended

environments

devices Smart Grid

in harsh

OBD-II

Not

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- POS, Headsets,
- Tablets
 Gateway,
- Gateway,
 Access Point

 Talamatica
- Telematics
- Tracking
- Healthcare

KYOCERA AVX antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for GPS/GLONASS enabled handheld devices, media players and other mobile communications devices.

GPS/GLONASS active patch antenna solution utilizes a Low Noise Amplifier (LNA) mounted on a PCB for superior performance.

Electrical Specifications

Typical Characteristics, on 70 x 70 mm PCB ground plane.

Frequency	1.575 GHz	1.593 – 1.610 GHz	
GNSS Bands	GPS	GLONASS	
Center Frequency f₀	1.575 GHz	1.602 GHz	
Gain at Zenith	5.0 dBic (typ)		
Output VSWR	1.5 (typ)		
Average Efficiency	79%		
Impedance	50 ohm		
Polarization	R.H.C.P		
Operation Voltage	3.0 ± 0.1 V		
LNA/Filter Gain	20 ± 3 dB (DC = 3.0 V)		
Operation Temperature	-40 to +85 °C		

Mechanical Specifications & Ordering Part Number


Ordering Part Number	1004259	
Size (mm)	25 x 25 x 6.5 mm	
Mounting	Attached to flat surface	
Weight (grams)	11.2	
Connector	IPEX MHF	
Cable (mm)	RF Ø 1.13 Gray, 76.0 ± 3	
Storage Temperature (°C)	-40 to +85	
Packaging	Plastic Tray	




GPS / GLONASS Active Patch Embedded KYOCERA AVX Antenna Specifications KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

VSWR and Efficiency Gain Plots


Typical performance on 70 x 70 mm PCB

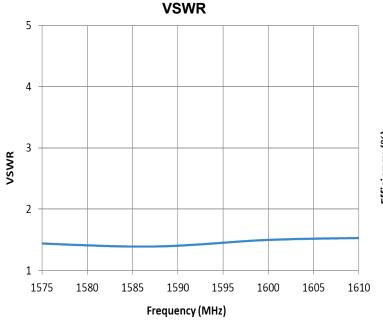


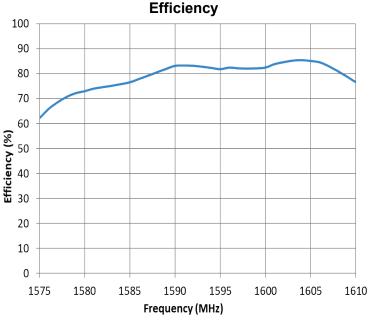

Axial Ratio/RHCP charts

Typical performance on 70 x 70 mm PCB

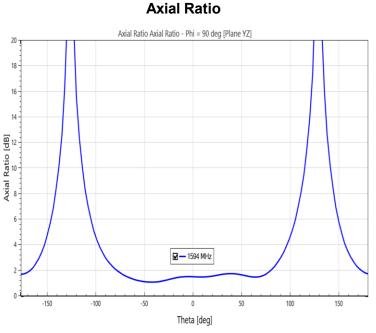

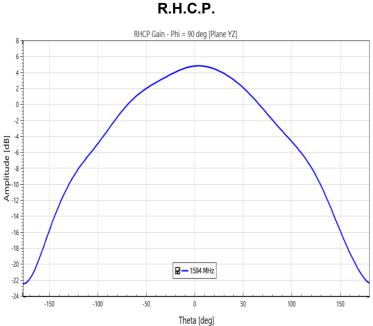







GPS / GLONASS Active Patch Embedded KYOCERA AVX Antenna Specifications KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Radiation Patterns


Typical performance on 70 x 70 mm PCB Measured @ 1575, 1602 MHz























GPS / GLONASS Active Patch Embedded KYOCERA AVX Antenna Specifications KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Filter/LNA Specifications

Gain	20 ± 3dB (3.0 ± 0.1V)		
Voltage (Vcc)	$3.0 \pm 0.1 V$		
Current (lin)	4.5±1.5 mA		
Output VSWR	2.0 max (DC = 3.0V)		

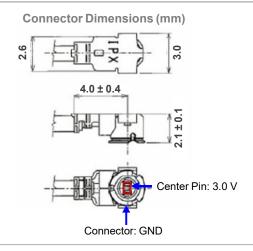

Mechanical Dimensions

Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)	D (mm)
1004259	25.0	25.0	6.5	76.0 ± 3.0

